

PTO DRIVEN AIR COMPRESSORS

New to the Australian market with enormous appeal, introducing the new Millers Falls Taiwanese Made Tractor PTO Driven Air Compressors which are sure to change the way large volume air production is accomplished in rural or remote settings.

Featuring an impressive 4 Cylinder 80CFM compressor and a 3 Cylinder 60CFM compressor, these premium quality units are fully manufactured in Taiwan and designed for years of trouble-free use under the most challenging conditions.

These units are compact in design with low weight so they can be easily mounted and carried by a large variety of tractors. At only 0.78 m3 in volume operating weights of 233/250 Kg respectively the Millers Falls PTO Driven Air compressors can be easily mounted onto the rear of your tractor and moved around your work area with ease.

Including a fitted Filter Regulator with 5 Quick Connect Couplings for multiple simultaneous air tool use, plus a large ½" BSP Direct Outlet for a larger volume of air with a high flow rate.


Unloader valves are fitted to each cylinder head of the pump, dumping air to atmosphere as soon as desired air receiver pressure is reached, this ensures less strain on the tractor, lower fuel consumption and increased durability of the pump.

The heavy-duty chassis and other main compressor components have been powder-coated to ensure longevity and durability in the harshest working conditions.


Unlike other mobile compressors with mounted diesel or petrol engines The Millers Falls **ACPTO3095** and **ACPTO4095** share the power and reliability of your tractor's engine. Meaning you will have air when and where you need it at a volume to perform the most demanding tasks. No need to tow trailer mounted air compressors or worry about petrol or diesel engines not starting.

There are a multitude of uses for these impressive air compressors including: blowing out farm machinery, large area sand blasting, air jack hammers and breakers, large air tools, multiple air tools at the same time, soda blasting, multiple pruning tools, large volume spray painting or whatever your imagination can think of.

Note: PTO Shaft Not Included

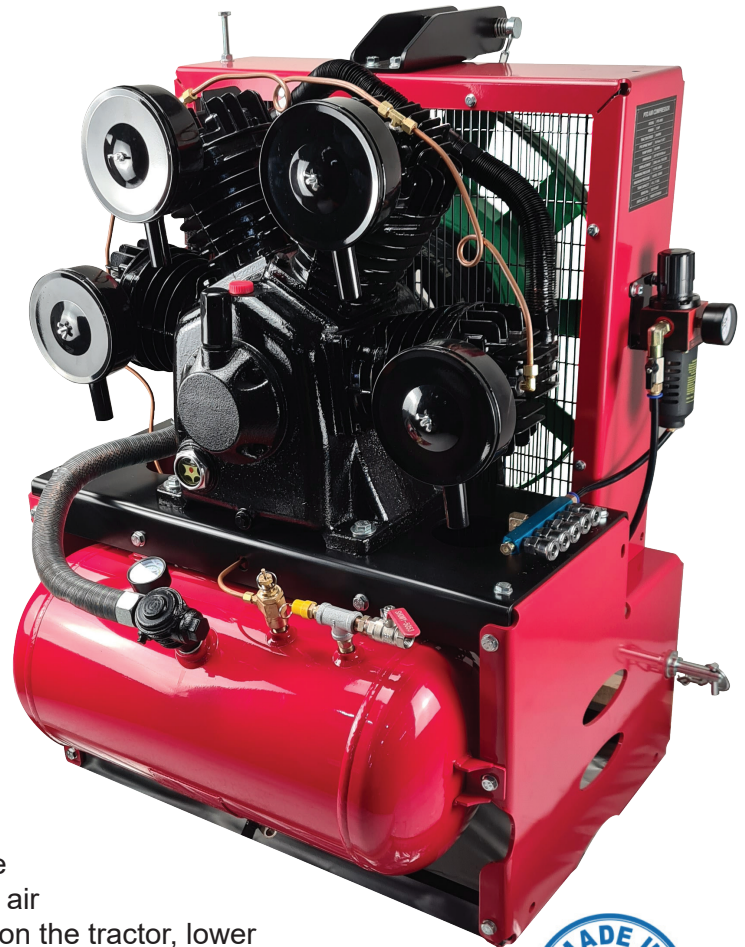

Model Number	ACPTO3095	Cylinders	3
Minimum Tractor HP	30	Pump RPM	850
Displacement L/MIN	1698	PTO RPM	540
Displacement CFM	59.8	Working Pressure PSI	115
FAD LPM	1172	Working Pressure BAR	8
FAD CFM	41.3	Max Pressure PSI	145
PTO Shaft Spline 1.375"	39.4mm	Max Pressure BAR	10
Receiver Size	41 L	Weight N.W/G.W	233/288kg
Dimensions L x W x H / CM	95 X 78 X 106	Pack Dimensions L x W x H	107 x 91 x 124

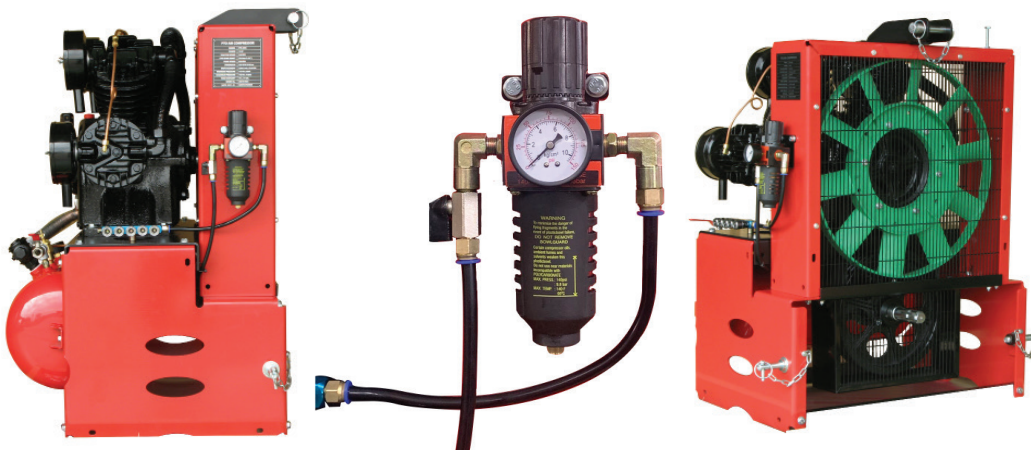

Model Number	ACPTO4095	Cylinders	4
Minimum Tractor HP	40HP	Pump RPM	850
Displacement L/MIN	2265	PTO RPM	540
Displacement CFM	79.8	Working Pressure PSI	115
FAD LPM	1564	Working Pressure BAR	8
FAD CFM	55.1	Max Pressure PSI	145
PTO Shaft Spline 1.375"	39.4mm	Max Pressure BAR	10
Receiver Size	41 L	Weight N.W/G.W	250/305kg
Dimensions L x W x H / CM	95 X 78 X 106	Pack Dimensions L x W x H	107 x 91 x 124